

ZEETA PLAFOND




Zeeta Plafond is a versatile LED ceiling luminaire that produces an even, pleasant light. The stylish ceiling lamp is an excellent luminaire for general lighting in schools, offices, sanitary facilities, changing rooms and corridors. The high IP classification makes it an option even in damp spaces. The luminaire is available ON/OFF version. The thin luminaire can be installed both on ceiling and wall surfaces.

Benefits

Stylish and versatile ceiling lamp with good moisture protection (IP54).

Suitability

For general lighting of various kinds of spaces, such as schools, offices, sanitary facilities, changing rooms or corridors. Installation on ceiling or wall surfaces. Also suitable for illuminating damp spaces.



GREENLED

Product families and variants

MODEL	TYPE CODE	POWER	LUMINOUS FLUX	LUMINAIRE EFFICACY	LIFETIME	OPERATING TEMPERATURE
Zeeta Plafond 12W	GLZP01012XX-F	12 W	1260 lm	105 lm/W	L70F10 > 50 000h	-25 - +45°C
Zeeta Plafond 18W	GLZP01018XX-F	18 W	1890 lm	105 lm/W	L70F10 > 50 000h	-25 - +45°C
Zeeta Plafond 25W	GLZP01025XX-F	25 W	2550 lm	102 lm/W	L70F10 > 50 000h	-25 - +45°C

Notes:

All values at ambient temperature +25°C, CCT 4000K, luminous flux +-5% tolerance, input power tolerance +-5%.

Dimensions

MODEL	TYPE CODE	LENGTH (L)	HEIGHT (H)	WIDTH (W)	WEIGHT
Zeeta Plafond 12W	GLZP01012XX-F	Ø 250 mm	48 mm		0,7 kg
Zeeta Plafond 18W	GLZP01018XX-F	Ø 300 mm	48 mm		0,8 kg
Zeeta Plafond 25W	GLZP01025XX-F	Ø 300 mm	48 mm		0,8 kg


General Description

COLOUR TEMPERATURE:	3000K, 4000K
COLOUR RENDERING INDEX:	$R_A \geq 80$
OPTIC:	Opal
LIGHT SOURCE SHIELD:	PC
IP CLASS:	IP54
SUPPLY VOLTAGE:	220-240 Vac
FREQUENCY:	50-60 Hz
PF:	>0,93
THD:	<20%
CONNECTION:	Terminal Block 3*2.5mm ²
DIMMABILITY:	On/off
COLOUR:	White

MATERIAL OF THE LUMINAIRE BODY: PC


GUARANTEE: 5 Years

Light distribution

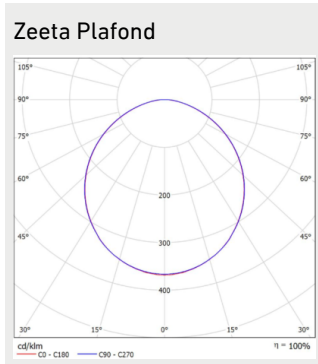

Dimensions

Zeeta Plafond

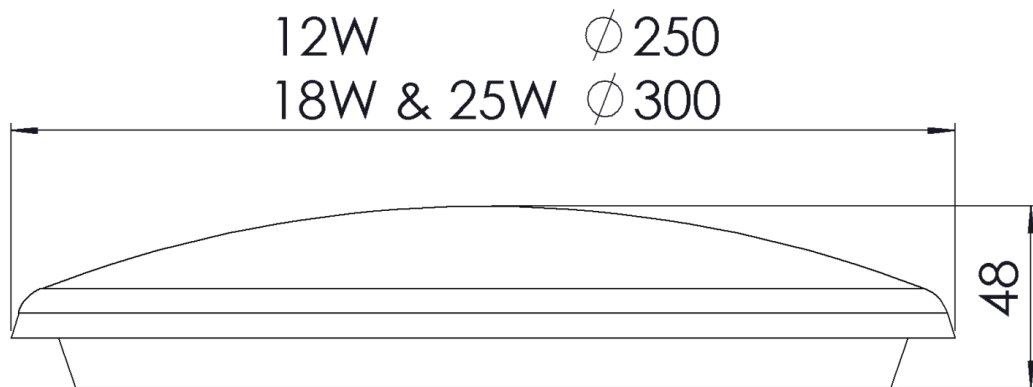

Circuit breakers

	B10	B16	B20	C10	C16	C20
Zeeta Plafond 12W	55	88	110	91	149	183
Zeeta Plafond 18W	37	59	73	61	100	122
Zeeta Plafond 25W	26	42	52	43	71	87

CUSTOMER SERVICE:

tel: +358 20 125 5800

info@greenled.fi